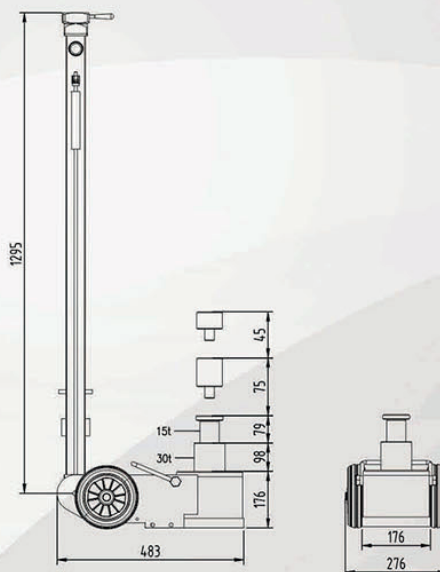
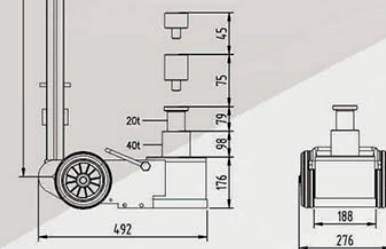


**S30-2E****S40-2E**

Model	Capacity	Net Weight	Packing Size	Working Air Pressure	Min Height	Max Height	Lifting Height	Extension Height
S30-2E	30t/15t	35kgs	51X38X23cm	0.9 ~1.2Mpa	176mm	473mm	30t:98mm 15t:79mm	75mm+45mm
S40-2E	40t/20t	37kgs	51X38X23cm	0.9 ~1.2Mpa	176mm	473mm	40t:98mm 20t:79mm	75mm+45mm

**Features**

- Slow down valve
- Imported sealing from USA
- Hard chrome plated both internal & external cylinder
- XTP industry sealing(double sealing function)
- Safety overload valve
- Self-return switch for safe working
- Oil anti-back system